

# Vandal Resistant Switch $\Phi 22\text{mm}$



**Anti-Vandal IK09/ Sealed IP65**


**Normal Open/ Normal Closed**

**Domed/ Flat/ High Flat**

**Stainless Steel**

**1,000,000 Cycles Momentary**


## Order Code

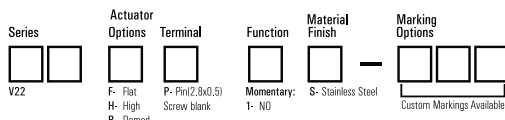


## Function



## Suggested Panel Cutout

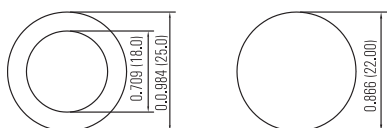

Max. Panel Thickness: 0.315 (8mm)

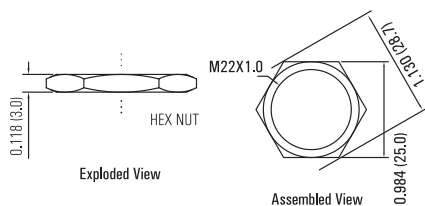

## Technical Data

Type	V22-F	V22-B	V22-H
Front Shape	Flat	Domed	High Flat
Terminal	Screw/ Pin (2.8X0.5)		
Max.Switch Rating	2A 48VDC		
Contact Resistance	$\leq 50\text{m}\Omega$		
Insulation Resistance	$\geq 1000\text{m}\Omega$		
Dielectric Strength	2000VAC		
Operation Temp	$-20^\circ\text{C} \sim +55^\circ\text{C}$		
Mechanical Life	1,000,000 Cycles		
Electrical Life	200,000 Cycles		
Contact Material	Silver Alloy		
Torque	5 ~ 14Nm		
Operation Pressure	approx. 5.5N		
Protection	IP65/ IK09		
Material	Stainless Steel		
Actuator	Stainless Steel		
Body	Stainless Steel		
Base	PBT		

## Dimension

